


New Wallace Avenue Bridge South Abutment Work and Shoring Wall Installation

Early July to Late August, 2021

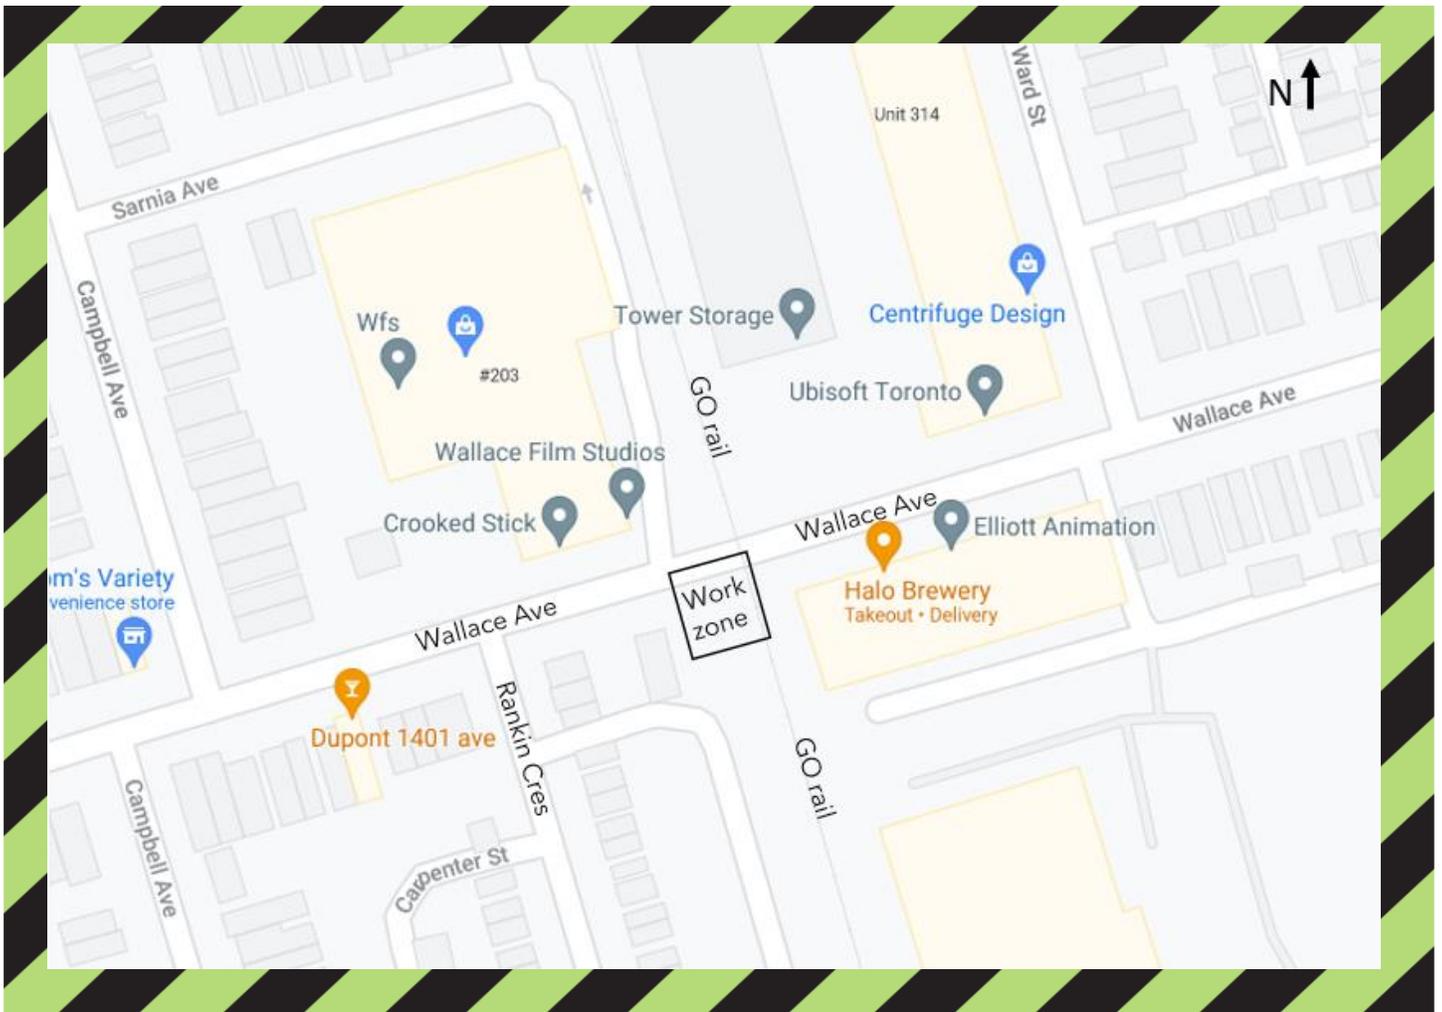

What work is taking place?

To facilitate construction of the new Wallace Avenue bridge, we need to build the south abutment, the concrete structure on the south side of the bridge on which the bridge deck will rest. This starts with building the foundation for the abutment at the south side of the Wallace Avenue rail crossing. First, we need to drill caissons, which involves drilling, installing rebar cages and pouring concrete (as well as installing a drill rig platform for the drill rig to sit on). Next, we need to install two shoring walls - on the east side to protect the diversion track and the west side to protect the existing noise wall. Lastly, we need to build the pile cap for the abutment.

When

Early July to late August 2021.

Where

At the southwest corner of the Wallace Avenue rail crossing.

Hours

Monday to Friday from 7 a.m. to 6 p.m.

Overnight work will be required for east shoring wall installation - Metrolinx will notify the local residents.

**Please note that dates and times are approximate, and work could be rescheduled. For regular construction updates, please sign up for our Toronto West weekly newsletter by visiting our website at www.metrolinx.com/davenport or follow us on Twitter @GOExpansion.*

What to expect

Nearby residents can expect construction activity and noise. A drill rig and crane will be stationed on site, and concrete trucks will make periodical deliveries during concrete pour days.

This notice can be translated into a different language upon request by emailing us at TorontoWest@metrolinx.com.

Esta notificação pode ser traduzida para o português. É só enviar um e-mail com o seu pedido ao TorontoWest@metrolinx.com.

Contact Us:

Write to us at: TorontoWest@metrolinx.com

Find us on Twitter @GOExpansion

Visit the website: www.metrolinx.com/davenport

Call us at: 416-202-6911