


Community Update on Evening/Night Work

May to July 2021

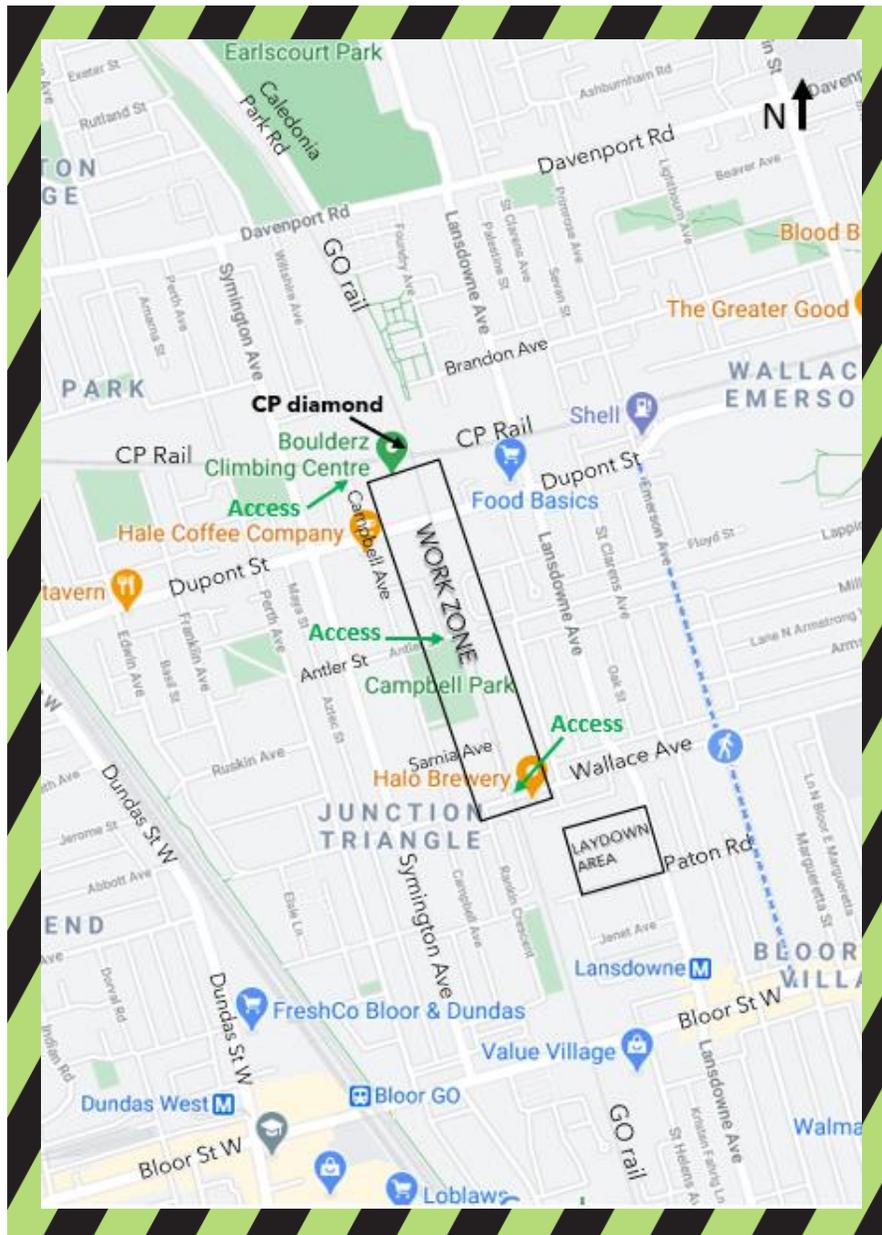

What Is New:

Hours

Caisson drilling was originally scheduled in your area until 3:00 a.m., but the drill rig will now stop operating at approximately 11:00 p.m. Wrap-up and cleanup will continue afterwards, with all other equipment operating until approximately 1:00 a.m. On occasion, crews may work past 11:00 p.m. to finish a concrete pour - this is considered wrap-up. Other activities that may go past 11:00 p.m. include concrete pours, crane lifts, equipment moves, and use of an oscillator to push casing. Crews will be off site by approximately 1:00 a.m.

**Please note that dates, times, and locations are approximate, and work could be rescheduled.*

What to expect

Work is sequenced to reduce disruption at night as much possible. Nearby residents can expect noise and lights in the rail corridor until 1:00 a.m., as well as nighttime traffic and activity at our constructor's laydown area at Lansdowne and Paton. A drill rig and crane will be on site and concrete trucks will make deliveries via Wallace Ave., Antler St., and Campbell Ave. This work covers a large area, and disruptions to residents will vary based on their proximity to the work.

What work is taking place?

Caisson drilling involves drilling a hole into the ground down to more supportive bedrock, lifting in steel rebar cage reinforcement, and then pouring concrete. This creates reinforced concrete columns underground that will form structural piers to support the load of the elevated guideway structure above.

When

Caisson drilling, including installing rebar cages and pouring concrete, resumes next week on Monday, May 3 just north of Antler Street. Crews are also working south of Antler Street tying rebar cages. Caisson drilling is expected to move down to Wallace Avenue the week of May 10 and work north, up towards Antler Street. This work will last until July when caisson drilling is expected to be complete. Work will be carried out six days a week, Monday through Saturday.

Where

Work is taking place between the CP diamond and Wallace Ave within the rail corridor:

From the CP diamond to Dupont St: complete

From Dupont St to Antler St: late-February to mid-May

From Wallace Ave to Antler St: mid-May to July

This notice can be translated into a different language upon request by emailing us at TorontoWest@metrolinx.com.

Esta notificação pode ser traduzida para o português. É só enviar um e-mail com o seu pedido ao TorontoWest@metrolinx.com.

Contact Us:

Write to us at: TorontoWest@metrolinx.com

Find us on Twitter @GOExpansion

Visit the website: www.metrolinx.com/davenport

Call us at: 416-202-6911