


Retaining Walls 6 & 7 Construction

As early as November 8, 2021 to February 2022

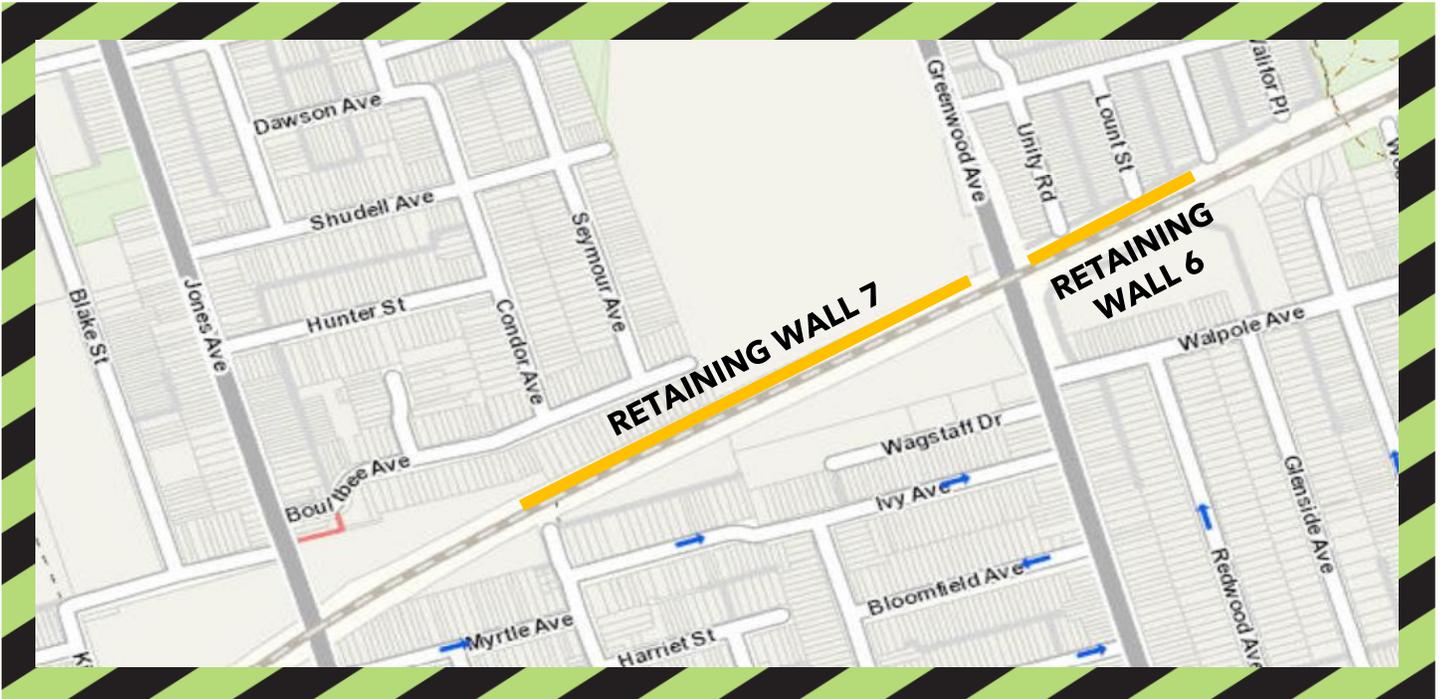

What Work Is Taking Place?

- Crews will begin pile installation for the construction of two (2) retaining walls within the rail corridor near Greenwood Avenue.
- Retaining Wall 6 is east of Greenwood Avenue and approximately 180 meters long. Pile and caisson installation for this wall will start first and take about a month to complete.
- Retaining Wall 7 is west of Greenwood Avenue and approximately 495 meters long. Pile and caisson installation for this wall will begin after Retaining Wall 6 is finished and take approximately 6 weeks to complete.

What to Expect?

The retaining walls are made up of steel piles drilled into the earth and backfilled with concrete to ground elevation. Pre-cast concrete panels are placed in between the steel piles, above ground level. Caissons are structures necessary to pump out water/moisture to create suitable working conditions for retaining wall works. Residents will see construction equipment within the rail corridor, including an excavator, dozer, dump truck, drilling rig and concrete trucks. Some noise, dust, and vibration is expected with this work, varying based on the type of work. We understand that this work impacts residents in the surrounding area and Metrolinx is taking all reasonable precautions to minimize disturbances. This includes:

- Reduced idling - whenever possible, idling will be reduced or eliminated to minimize the accumulation of construction noise
- Limited reversing - when possible, reversing will be avoided to reduce the noise associated with backup alarms and monitors (installed on all construction equipment)
- Noise vibration monitoring - this has already been set up to ensure that noise levels are within the exposure limits

HOURS OF WORK

- Work will occur between the hours of 7:00 a.m. and 7:00 p.m. five (5) days per week (Monday to Friday).
- Work may be rescheduled due to unforeseen circumstances.

TRAFFIC & PEDESTRIAN DETAILS

- Traffic will not be impacted at this time.
- Pedestrians will not be impacted at this time.
- TTC will not be impacted.
- Advanced notice of traffic impacts will be provided through our weekly e-newsletter.
- Increased construction vehicles and equipment can be expected in the work area.
- The corridor will be accessed via Unity Road, with the construction laydown in the corridor.

OTHER INFORMATION

- For the latest information on what's happening in your area please e-mail TorontoEast@Metrolinx.com and ask to subscribe to our weekly e-newsletter or register for updates at metrolinx.com/lakeshoreeastrailcorridor.
- Please exercise caution around active construction sites.

PROJECT INFORMATION

- We're making improvements today to bring you even more service in the future. Preparatory early works are underway on the Lakeshore East Rail Corridor Expansion project in Toronto. This project covers the area between Pape Avenue and Kennedy Road. Completing this work will enable the future addition of a fourth track and electrification infrastructure on the Lakeshore East line.
- Electrification is a key part of building a quieter, faster, more efficient network across the region. The new fourth track will improve journey times for all transit trips on the Lakeshore East Corridor, improve reliability and deliver more service within the City of Toronto. For more information on this project and to see all construction notices, please visit metrolinx.com/lakeshoreeastrailcorridor.

Thank you for your patience as we work to transform the rail corridor in your area.

Visit our Agincourt Community Office:
Address: 4142 Sheppard Avenue East
Tel: 416-202-3900

Note our office is closed due to COVID-19 precautions

Contact Us:

Write to us at: TorontoEast@metrolinx.com

Find us on Twitter @GOExpansion

Visit the website: www.metrolinx.com

Disponible en français