


Lakeshore East Early Works: Retaining Walls 6 & 7

March 31, 2021

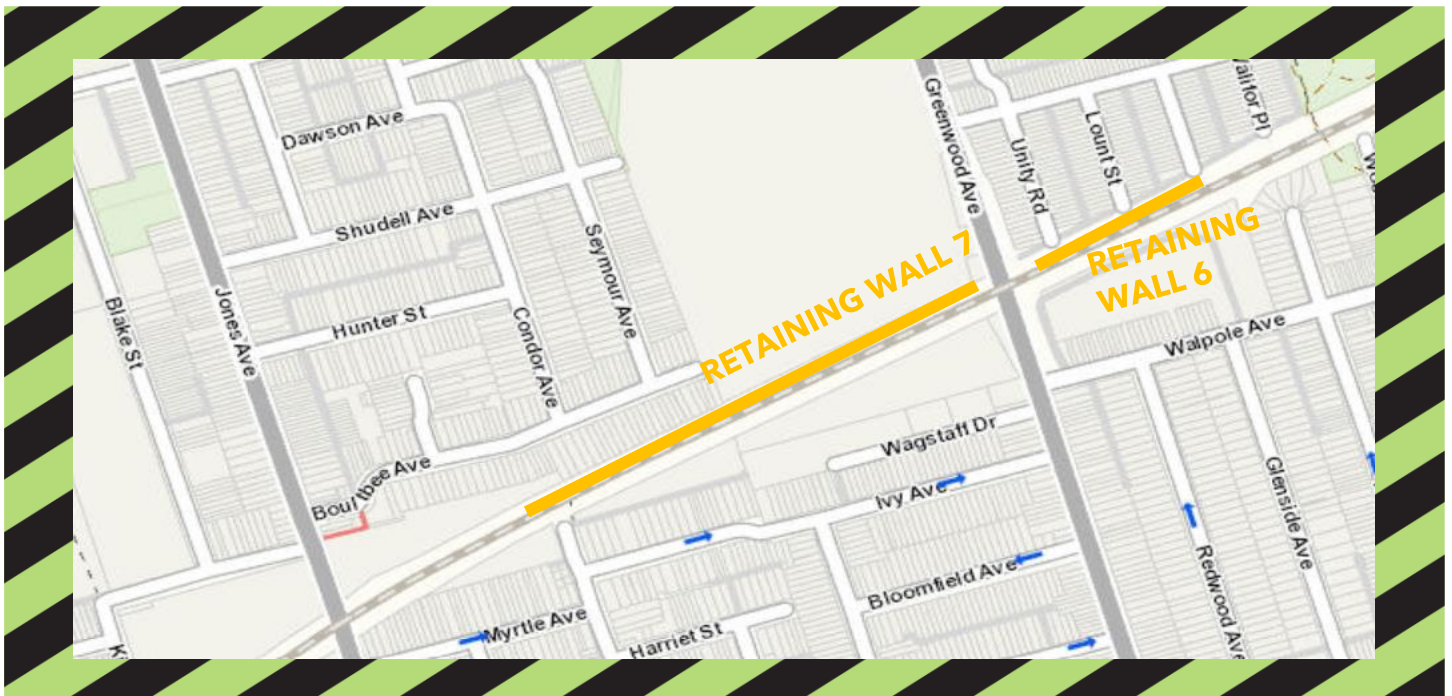

What Work Is Taking Place?

Crews will begin removing trees and other vegetation along the north side of the rail corridor in mid-April 2021 within the Metrolinx Right-of-Way, from east of Greenwood Avenue to Condor Avenue. That work will be followed by the construction of two (2) retaining walls:

- Retaining Wall 7 is west of Greenwood Avenue and approximately 495 meters long.
- Retaining Wall 6 is east of Greenwood Avenue and approximately 180 meters long.

What to Expect?

For the clearing and grubbing activities residents will see construction equipment in the area including a tree feller, feller buncher, mulcher, dozer, excavator and dump trucks.

Visit our Agincourt Community Office:
Address: 4142 Sheppard Avenue East
Tel: 416-202-3900

Contact Us:

Write to us at: TorontoEast@metrolinx.com
Find us on Twitter @GOExpansion
Visit the website: www.metrolinx.com
Disponible en français

The retaining walls are made up of steel piles drilled into the earth and backfilled with concrete to ground elevation. Pre-cast concrete panels are placed in between the steel piles, above ground level. Residents will see construction equipment within the rail corridor, including an excavator, dozer, dump truck, drilling rig and concrete trucks. Residents should expect some noise, vibration, dust and site lighting.

HOURS OF WORK

Work for clearing and grubbing will occur during the day.

- Work will occur between the hours of 7:00 a.m. and 5:00 p.m., five (5) days per week (Monday to Friday)

Work at Retaining Wall 6 will be conducting during the day.

- Work will occur between the hours of 7:00 a.m. and 5:00 p.m., five (5) days per week (Monday to Friday)
- Additional work may be required during the evening hours. Advanced notice will be provided through our weekly regional e-newsletter.

Work at Retaining Wall 7 will be conducted overnight.

- Work will occur between the hours of 7:00 p.m. and 6:00 a.m., five (5) days per week (Monday to Friday)

Please note that work may be rescheduled due to unforeseen circumstances.

TRAFFIC & PEDESTRIAN DETAILS

- Minimal traffic impacts are anticipated with this work. Where traffic impacts are expected, notice will be provided through our weekly regional e-newsletter.
- No pedestrian impacts are anticipated with this work.

PROJECT INFORMATION

- We're making improvements today to bring you even more service in the future. Preparatory early works are getting underway on the Lakeshore East Rail Corridor Expansion project in Toronto. This project covers the area between Pape Avenue and Kennedy Road. Completing this work will enable the future addition of a fourth track and electrification infrastructure on the Lakeshore East line.
- Electrification is a key part of building a quieter, faster, more efficient network across the region. The new fourth track will improve journey times for all transit trips on the Lakeshore East Corridor, improve reliability and deliver more service within the City of Toronto. For more information on this project and to see all construction notices please visit metrolinx.com/lakeshoreeastrailcorridor.

OTHER INFORMATION

- For the latest information on what's happening in your area please e-mail TorontoEast@Metrolinx.com and ask to subscribe to our weekly e-newsletter.

Thank you for your patience as we work to transform the rail corridor in your area.

Visit our Agincourt Community Office:
Address: 4142 Sheppard Avenue East
Tel: 416-202-3900

Contact Us:

Write to us at: TorontoEast@metrolinx.com
Find us on Twitter @GOExpansion
Visit the website: www.metrolinx.com
Disponible en français